

XKP-06 (<1.0kW) Swimming pool pump < 1,0 kW

Application

- Suitable for water circulation in small and medium swimming pools. Lightly dirty water with suspended particles will be perfectly filtered

Pompe

- Plastic body pump
- AISI 304 stainless steel shaft
- Maximum liquid temperature: +35°C
- Maximum suction height: 3.5 m

Moteur

- Copper winding motor or aluminium
- Integrated thermal protection for single-phase motors
- Insulation class: F
- Protection class: IPX5

Identification codes

XKP 45 6


— series
— Power (x100 W)
— pool pump



Technical data


		Q (m³/h)	0	3	6	9	12	15
MODEL	kW	Q (l/min)	0	50	100	150	200	250
XKP256	0.25		7.5	6.3	2.9			
XKP306	0.3		8.5	6.3	2.9			
XKP356	0.35		9.5	8.2	6.2	1.5		
XKP456	0.45		10.3	9.2	7.2	4.1		
XKP556	0.55		12	11	9.9	8	5.5	
XKP856	0.85		12.5	12.4	11.8	10.5	8.5	6

Dimensions

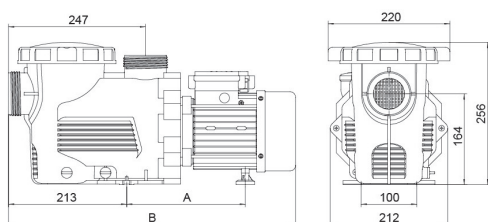

MODEL	A	B
XKP256	157.5	374
XKP306	157.5	374
XKP356	157.5	374
XKP456	157.5	374
XKP556	188.5	405
XKP856	188.5	405

Hydraulic performance

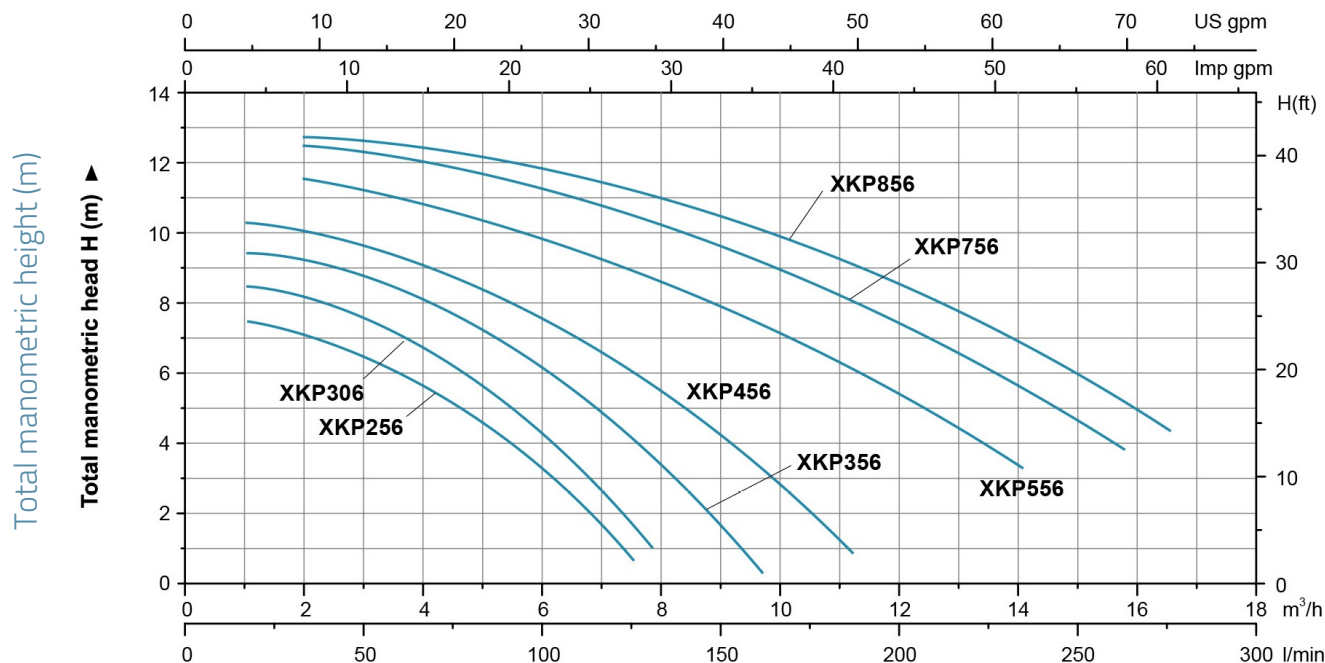

Packaging

MODEL	Weight (kg)	Length L (mm)	Width W (mm)	Height H (mm)
XKP256	5.4	410	170	200
XKP306	6	410	170	200
XKP356	5.8	410	170	200
XKP456	6.1	410	170	200
XKP556	6.4	410	170	200
XKP856	7.4	410	170	200

